Atrust
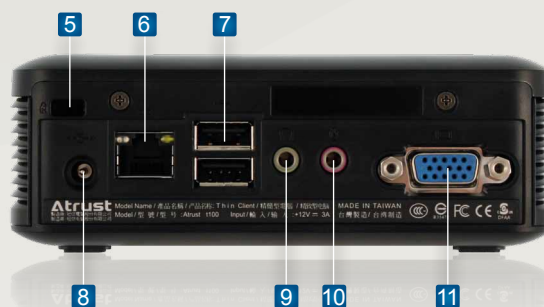
Thin Client
Atrust t100L

Atrust t100L is a Linux based thin client computer and is designed for entry level thin client users. It features VIA Eden 1.0GHz processor and bundles major protocols and applications, for instance VMware View, Citrix XenDesktop, Citrix XenApp, Microsoft RDP, Local Browser, PDF Reader and Flash Player. By bundling a rich array of software, it's the best choice for clients in a server-based computing environment.
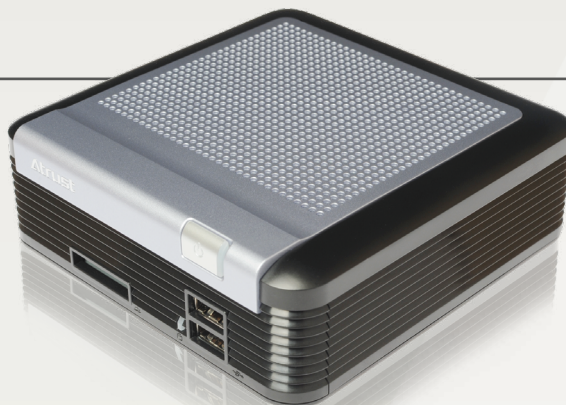
1 Power Botton
Press to power on/off the client.

2 Power LED
Lights blue when t100L is powered on.

3 SSD LED
Lights yellow when the SSD is accessed.

4 USB Port
Connects to a USB device.

5 Kensington Lock Slot
Attach your t100L to a permanent object with the Kensington slot and a security cable.

6 LAN Port
Connects to a local area network.

7 USB Port
Connects to a keyboard, mouse, or USB device.

8 DC IN
Connects to an AC adaptor.

9 Headphone Port
Connects to a set of headphones or a speaker system.

10 Microphone Port
Connects to a microphone.

11 VGA Port
Connects to a monitor.

Atrust t100L Features

- ❯ Durable and quiet design
- ❯ Simplified management
- ❯ Low power consumption
- ❯ Lower total cost of ownership (TCO)
- ❯ Supported Protocols
  t100L supports the following protocols:
  Citrix ICA/HDX, Microsoft RDP, VMware PCoIP

Atrust t100L

System	
Processor	VIA Eden 1.0GHz
Chipset	VIA VX800UT

Memory	
System memory	512MB
Flash memory	512MB

Graphics	
Processor	VIA Chrome9 HC3 Integrated Graphics
Video memory	32-256 MB shared memory
Maximum resolutions	1920 x 1200

I/O Interfaces	
USB	Keyboard, mouse and other USB devices
Video	VGA-type video output (D-sub 15)
I/O ports	1 VGA, 2 front USB, 2 rear USB, 1 RJ45, 1 headphone, 1 microphone, 1 DC IN, 1 Kensington lock slot

Networking	
Ethernet	10/100Mb

Dimensions / Weight	
Dimensions	(W) 128 x (D) 45 x (H) 128 mm
Weight	580g (approximate)

Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0℃ ~ 40℃ in vertical / 0℃ ~ 35℃ in horizontal
Non-operating temperature	-30℃ ~ 60℃
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%

AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+12V DC

Energy Consumption	
Idle power	Around 7.2W

Software	
Operating system	Atrust Linux
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix ICA/HDX, Microsoft RDP, VMware PCoIP
Network standard	Ethernet, DHCP, SSL, PPPoE, Wake on LAN
Regulatory	CB, FCC, CE, CCC, BSMI, NRTL
Options	VESA Mount Kit (W) 136 x (D) 62.4 x (H) 135.2 mm WiFi 802.11 b/g (Manufacturing option)

FC FC CE CCC c US R35471